



> DOWN-CONDUCTORS AND ACCESSORIES

> ACCESSORIES

> GUARD TUBE


Anti-vandal guard for cable or tape down-conductors. In order to avoid the cable breaking due to accidental impacts, it is necessary to install a guard tube, which is at least 2 metres high, wherever the cable is accessible. AT-056G is recommended to prevent touch voltages in public buildings with low resistivity soil.

Reference	Dimensions (mm)	Conductor range			Includes	Material	Weight (kg)
		Ø (mm)	mm ²	Tape (mm)			
AT-051G	Ø27 x 2000	8 - 10	50 - 70	-	Bonding clamps	Galvanized steel	3
AT-050G	Ø27 x 3000	8 - 10	50 - 70	-	Bonding clamps	Galvanized steel	5
AT-054G	Ø27 x 2000	8 - 10	50 - 70	-	Bonding clamps	Stainless steel	2.3
AT-053G	Ø27 x 3000	8 - 10	50 - 70	-	Bonding clamps	Stainless steel	3.5
AT-056G	Ø26 x 2500	8 - 10	50 - 70	-	Bonding clamps	3 mm cross-linked polyethylene	0.7
AT-060G	40 x 14 x 2000	-	-	30 x 2 - 30 x 3.5	Bonding clamps	Galvanized steel	1
AT-063G	40 x 14 x 2000	-	-	30 x 2 - 30 x 3.5	Bonding clamps	Stainless steel	1
AT-055G	70 x 15 x 2000	8 - 10	50 - 70	30 x 2 - 30 x 3.5	Plug and screw	Galvanized steel	3
AT-057G	40 x 30 x 1500	7 - 10	35 - 70	-	Straight clamp and KS cable clip	Galvanized steel	2.6

Complies with UNE 21186, NF C 17-102



- AT-053G (SS - stainless steel)
- AT-051G (GS - galvanized steel)

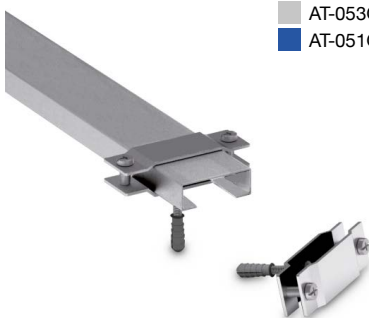

- AT-063G (SS - stainless steel)
- AT-060G (GS)

